

# THREE PHASE STRING INVERTER 100-110 KW

# © CanadianSolar

# CSI-100K-T400 | CSI-110K-T400

Canadian Solar's grid-tied, transformer-less string inverters help to accelerate the use of three-phase string architecture for commercial rooftop and small ground-mount applications. An NRTL approved, cost-effective alternative to central inverters, these inverters are modular design building blocks that provide high yield and enable significant BoS cost savings. They provide up to 98.7% conversion efficiency, a wide operating range of  $180\text{-}1000\,\mathrm{V}_{\mathrm{DC}}$ , and  $10\,\mathrm{MPPTs}$  for maximum energy harvest.




standard warranty, extension up to 20 years

### **KEY FEATURES**

- Maximum efficiency of 98.7%,
   Maximum EU efficiency of 98.3%
- 10 MPPTs to achieve higher system efficiency
- 13 A input for each PV string
- Integrated DC Switches
- Smart string monitoring and IV curve diagnosis

# **EFFICIENCY CURVE**

CSI-110K-T400GL02-E

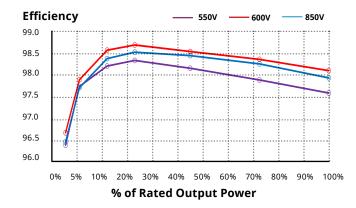

For detailed information, please refer to the Installation Manual.

### **HIGH RELIABILITY**

- Intelligent redundant fan-cooling
- SPD type II on both DC and AC sides
- Leakage current repression technology
- Fuse free design
- DC reverse polarity protection

### **BROAD ADAPTIBILITY**

- IP66 rated for outdoor application
- Utility interactive controls: Active power derating, reactive power control and over frequency derating
- Wide MPPT range for flexible string sizing
- High switching frequency and ultra fast MPPT for maximum efficiency over a wide load range

**CSI SOLAR CO., LTD.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey. As a leading PV project developer and manufacturer of solar modules with over 46 GW deployed around the world since 2001.

## CSI SOLAR CO., LTD.

SYSTEM/TECHNICAL DATA	CCI 400V 7400CI 00 F		CCI 440V T400CI 00 5
MODEL NAME	CSI-100K-T400GL02-E		CSI-110K-T400GL02-E
May DC Input Voltage		1100 V	
Max. DC Input Voltage Start-up DC Input Voltage/Power	1100 V <sub>DC</sub> 195 V <sub>DC</sub>		
Number of MPP Trackers	195 V <sub>DC</sub>		
MPPT Voltage Range	180 - 1000 V <sub>DC</sub>		
Max. Input Current (Imp)	260 A (26 A per MPPT)		
Max. Short Circuit Current (Isc)	400 A (40 A per MPPT)		
Number of DC Inputs	20 (2 per MPPT)		
DC Switch	Integrated		
AC OUTPUT			
Rated AC Output Power	100 kW		110 kW
Max. AC Output Power	110 kW		121 kW
Rated Output Voltage*	220 /	380 V <sub>AC</sub> , 230 / 400 V <sub>AC</sub>	
Grid Connection Type	3W / N / PE		
Rated Grid Output Current	152.0 A		167.1 A
Max Output Current	167.1 A		183.8 A
Rated Output Frequency		50 / 60 Hz	
Output Frequency Range*	47 - 52 / 57 - 62 Hz		
ower Factor	> 0.99 (0.8 leading 0.8 lagging)		
Current THD	< 3 %		
OC Injection Current	< 0.5 % of Rated Grid Output Current		
YSTEM			
lax. Efficiency	98.7 %		
U Efficiency	98.3 %		
light Consumption	< 2 W		
nti-PID Module		Optional	
NVIRONMENT			
rotection Degree	IP66		
poling	Intelligent Redundant Cooling		
perating Temperature Range	-25 °C to +60 °C		
orage Temperature Range	-40 °C to +70 °C		
perating Humidity	0 - 100 % condensing		
perating Altitude	4000 m		
udible Noise		< 65 dBA @ 1 m	
DISPLAY AND COMMUNICATION		160.2.22	
Display	LCD, 2 × 20 Z		
Communication	RS485 / WiFi Optional		
MECHANICAL DATA		SEVE67 V 244 E	
Dimensions (W x H x D)	1065 x 567 x 344.5 mm		
Weight	84 kg		
nstallation Angle	0 ~ 15 Degrees from Vertical		
DC Inputs SAFETY		MC4	
Safety and EMC Standard	IEC 6210i	9-1/2 TEC 61000 6 1/2/3	3//
Grid Standard	IEC 62109-1/2, IEC 61000-6-1/2/3/4 IEC 62116, IEC 61727, EN 50549-1		
Ji iu Jiai luai u	1EC 02110, 1EC 01727, EN 303451		

 $<sup>{\</sup>bf *The~"Rated~Output~Voltage~Range"~and~"Output~Frequency~Range"~may~differ~according~to~specific~grid~standard.}\\$ 

The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without notice.

Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.

### CSI SOLAR CO., LTD.