

LITHIUM IRON PHOSPHATE BATTERY

MUST

May the power be with you




LP1600 Series


MUST wall mounted Lithium battery (LiFePO4 Battery) solutions are highly integrated, deep cycle backup power solutions for your solar home energy storage system. With rich experience and advanced techniques, the product has the features of the fashionable design, high energy, high power density, long service life, and easiness of installation and expansion.

* Custom capacity is acceptable.

Pic of Input & Output Port

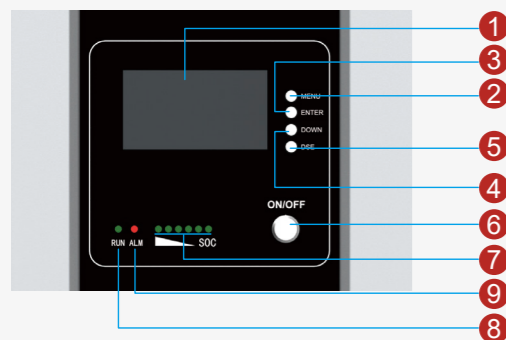

- 1. LCD display
- 2. Menu buttons
- 3. Enter buttons
- 4. Down buttons
- 5. DES buttons
- 6. Switch on/off
- 7. SOC indicator
- 8. RUN indicator
- 9. Alarm indicator

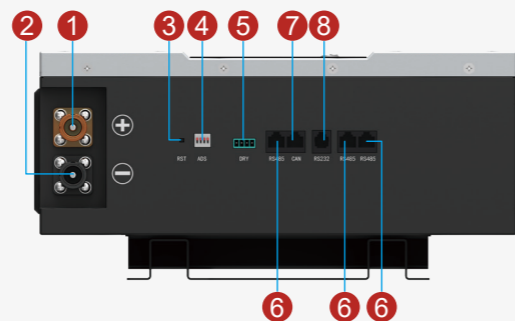

- 1. BAT+
- 2. BAT-
- 3. RST port
- 4. ADS switch
- 5. DRY port
- 6. RS485 communication port
- 7. CAN port
- 8. RS232 communication port

LITHIUM IRON PHOSPHATE BATTERY LP1600 SERIES

MUST

Specifications

MODEL	LP16-2450	LP16-24100	LP16-24200	
Nominal voltage	25.6V			
Nominal Capacity	50Ah	100Ah	200Ah	
Nominal energy	1280Wh	2560Wh	5120Wh	
Life Cycles	4000+ (80% DoD for effectively lower total of ownership cost)			
Recommended Charge Voltage	28.8V			
Recommended Charge Current	20.0A			
End of discharge voltage	22.0V			
Standard method	Charge	10.0A	20.0A	40.0A
	Discharge	25.0A	50.0A	100.0A
Maximum continuous current	Charge	50.0A	100.0A	100.0A
	Discharge	50.0A	100.0A	100.0A
BMS Cut-Off Voltage	Charge	<29.2V (3.65V/Cell)		
	Discharge	>22.0V (2s) (2.75V/Cell)		
Temperature	Charge	-4 ~ 113 °F (0 ~ 45 °C)		
	Discharge	-4 ~ 131 °F (-20 ~ 55 °C)		
Storage Temperature	23~95 °F (-5~35 °C)			
Shipment voltage	≥25.6V			
Module Parallel	Up to 4 units			
Communication	CAN2.0/RS232/RS485			
Case Material	SPPC			
Dimension (L x W x H)	/	/	/	
Approx. Weight	/	/	/	
Charge retention and capacity recovery capability	Standard charge the battery, and then put aside at room temperature for 28d or 55 °C for 7d, Charge retention rate≥90%, Recovery rate of charge≥90			



High cycle life
4000 cycles @80% DoD for effectively lower total of ownership cost.



Quickly recharge
Save time and increase productivity with less down time thanks to superior charge/discharge efficiency.



Longer service life
Low maintenance batteries with stable chemistry.



Extreme heat tolerance
Suitable for use in a wider range of applications where ambient temperature is unusually high: up to +60°C.



Built in circuit protection
Battery Management System (BMS) is incorporated against abuse.



Lightweight
Lithium batteries provide more Wh/Kg while also being up to 1/3 the weight of its SLA equivalent.



Better storage
Up to 6 months thanks to its extremely low self discharge (LSD) rate and no risk of sulphation.



Function
Support parallel operation

The technical specifications of this document are subject to change without any notice